



GAST MANUFACTURING, INC.
 A Unit of IDEX Corporation
 Post Office Box 97
 Benton Harbor, Michigan
 Ph: 269/926-6171
 Fax: 269/925-8288

PART NUMBER:

LTD153

REV.

B

Product Specifications



MODEL NUMBER	HP/kw AT MAX RPM AND VACUUM	HP/kw AT MAX RPM AND PRESSURE	MAX RPM	MAX VAC		MAX PRESS		NET WT.	
				"H ₂ O	mbar	"H ₂ O	mbar	lbs.	kg
SDR5	8/5,96	10/7,46	5500	120	299	152	379	37	17

SOUND LEVEL 72 dB(A) MAX. @ 3450 RPM
 NORMAL AMBIENT -29°C TO 40°C
 RELATIVE HUMIDITY 0% - 100% NON CONDENSING
 ENVIRONMENT CLEAN DUST FREE

TECHNICAL DATA SUBJECT TO
 CHANGE WITHOUT NOTICE.

DO NOT OPERATE ABOVE 5500 RPM

* = RECOMMENDED MAXIMUM DUTY
 - - - INTERMITTENT DUTY ONLY

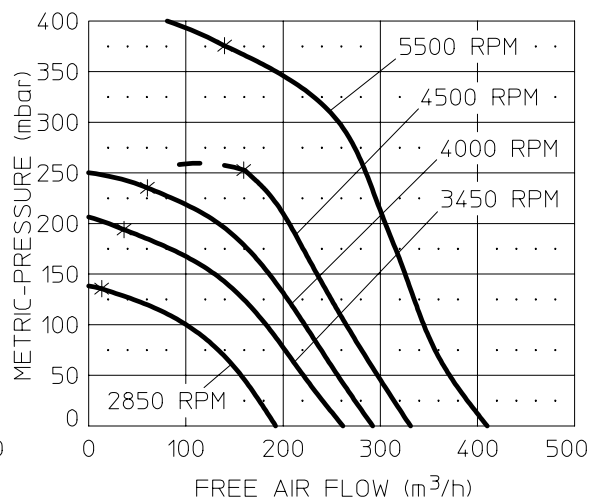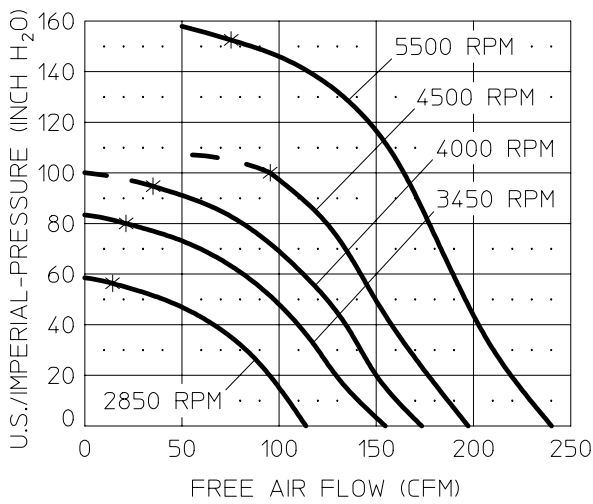



PERFORMANCE DATA

THE PERFORMANCE DATA SHOWN WAS DETERMINED
 UNDER THE FOLLOWING CONDITIONS:

LINE VOLTAGE @ 60 Hz. 230V OR 460V FOR 3 PHASE
 UNITS. 115V OR 230V FOR 1 PHASE UNITS.

LINE VOLTAGE @ 50 Hz. 220V FOR 3 PHASE OR 1
 PHASE UNITS.

UNITS IN A TEMPERATURE STABLE CONDITION.

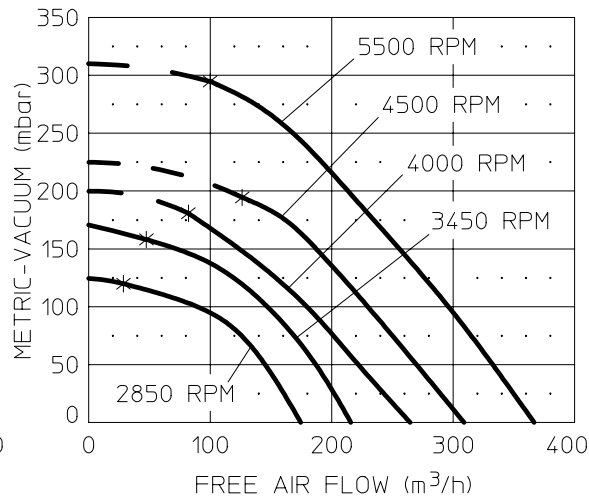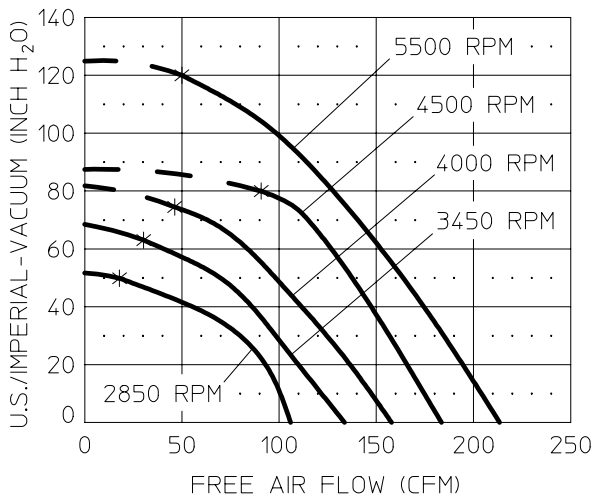

DELIVERY MEASUREMENTS MADE WITH OUTPUT PORT
 THROTTLED.

SUCTION MEASUREMENTS MADE WITH INPUT PORT
 THROTTLED.

TEST CONDITIONS: INLET AIR DENSITY @ 0.075 lbs. per
 cu. ft. [20°C (68°F), 29.92" Hg (14.7 PSIA)].

NORMAL PERFORMANCE VARIATIONS ON THE RESISTANCE
 CURVE WITHIN ±10% OF SUPPLIED DATA CAN BE EXPECTED.

Product Dimensions

Metric (mm) / U.S. Imperial (inches)

